

Estimation and classification of potential severe earthquake victims in the metropolitan area of Granada

MARGARITA MARTÍNEZ-ZALDÍVAR MORENO¹, FRANCISCO VIDAL SÁNCHEZ²,
FRANCISCO JAVIER GÓMEZ JIMÉNEZ³

¹Family and Community Medicine. Critical Care and Emergencies Service. Healthcare region of Granada, Spain.

²Andalus Institute of Geophysics. University of Granada, Spain. ³Department of Medicine. University of Granada, Spain.

CORRESPONDENCE:

Francisco Javier Gómez Jiménez
Departamento de Medicina
Avda. de Madrid 12
18012 Granada, Spain
E-mail: fgomez@ugr.es

RECEIVED:

29-6-2007

ACCEPTED:

10-12-2007

CONFLICT OF INTEREST:

None

Objectives: To predict the potential number of victims which caused by a hypothetical scale VIII earthquake VIII with the epicentre in Sierra Elvira (near Granada) and to classify the casualties based on of the location and severity of the injuries. These data were compared with those estimated for an other much less probable earthquake of scale IX in the same area.

Methods: An earthquake scenario simulator, SES 2002, and tables of human vulnerability proposed by Sopra and Schiavi were used.

Results: The expected estimates of damaged dwellings were 436 collapsed, 4787 heavily damaged and 21251 moderately damaged. The expected numbers of casualties were 313 deaths, 1865 people injured (of different categories) and 35113 people without home. Casualty triage was 73 of 1st category (very severe critical, red), 258 of 2nd category (moderate, yellow) and 1534 of 3rd category (walking wounded, green). The most frequent lesion locations were inferior limbs (26%) followed by polytraumas (23%), head injuries (19%), upper limbs (13%), thorax (10%), pelvis (6%) and spinal cord lesions (3%).

Conclusions: These estimates are critical to adjust the Healthcare Action Plan and indicate that healthcare attendance must be graded, with a minimum of 6 Advanced Healthcare Positions established in less than 2 hours for immediate medical intervention, and in less than 8 hours for Units of Prehospital Stabilization and Units of Surgical Rescue should be installed for stabilization of critical patients. A field hospital is also necessary in case of earthquake I-IX or a reduction in the operability of Granada hospitals. [Emergencias 2008;20:198-206]

Key words: Earthquake. Emergency Medical Services. Triage. Natural disaster. Rescue work. Mass casualty incidents.

Introduction

Urgent medical care in seismic catastrophes with multiple victims is a challenge and necessity from a healthcare emergency point of view. Catastrophes always imply a health problem because of the simultaneous presence of deaths and a large number of severe and mild casualties requiring urgent care which may overwhelm the capacity of local emergency departments. To develop an effective Healthcare Action Plan in the event of an earthquake, scenarios of estimated seismic damage and the number and severity of the possible victims in each case should be taken into account.

According to the Spanish Norms of Seismoresistant Construction (NCSE-02), the depression of Granada is the area of greatest seismic danger in Spain with active faults which threaten the metropolitan area¹. Historically damaging earthquakes of intensity (I) $\geq$ VIII of the European Macroseismic Scale (EMS) have occurred in this area such as the two in 1431 (I = IX-X) and in 1806 (I = VI-II-IX) with the epicentre in Pinos Puente. Another earthquake, with an epicentre in Arenas del Rey, took place in 1884 (I = IX) and was known as the Earthquake of Andalusia. This quake totally destroyed this town and numerous buildings collapsed and had severe structural damage in more

Table 1. Victims and damage due to seismic activity I=VIII with an epicentre in Sierra Elevada. Simulation performed with the SES 2002

Name	I (EMS)	D	C	Homeless	Total population	Collapss	Ver serious damage	Serious damage	Moderate damage	Slight damage
Pinos Puente	VIII	67	403	3,264	13,524	91	539	1,394	1,882	1,182
Atarfe	VIII	32	190	1,912	11,220	45	309	923	1,500	1,293
Chauchina	VIII	13	75	736	4,138	18	121	358	572	472
Fuente Vaq,	VIII	18	106	877	4,038	23	137	365	518	370
Santa Fé	VIII	43	257	2,307	12,740	64	400	1,144	1,787	1,523
Albolote	VIII	32	191	1,897	12,916	46	302	950	1,650	1,636
Cijuela	VIII	6	35	286	1,522	8	46	129	198	165
Maracena	VIII	38	226	2,214	14,331	56	368	1,129	1,908	1,814
Peligros	VIII	19	112	1,112	7,380	28	184	576	992	966
Vegasl Genil	VIII	6	36	370	2,791	9	60	197	361	390
Láchar	VIII	11	65	540	2,477	10	60	161	229	163
Calicasas	VIII	2	15	123	599	3	17	49	73	54
Cúllar Vega	VIII	7	43	406	3,171	11	68	216	386	419
Pulianas	VIII	10	58	535	3,835	14	85	268	471	493
Güevéjar	VIII	5	29	277	1,507	5	34	96	151	127
Jun	VIII	4	24	262	1,724	5	36	113	194	187
Granada	VII	0	0	10,982	244,767	0	1,222	8,348	24,524	38,959
Others	VI-VII	0	0	7,033	286,159	0	799	4,835	17,146	34,133
Total	VI-VIII	313	1,865	35,133	628,839	436	4,787	21,251	54,542	84,346

Estimated number of deaths (D), Casualties (C), homeless, total population, collapse, very serious damage, moderate damage, and slight damage.

than 20 villages of Granada and Málaga, with more than 1,300 deaths and around 1,500 seriously injured².

This study is centred on the scenario of the most probable seismic damage which an earthquake with a maximum I = VIII (corresponding to an "occasional" earthquake, according to Eurocode 8³ with an approximate possibility of 50% in 50 years) and an epicentre in the Sierra Elevada could cause the city of Granada, Spain and its metropolitan area. The number of victims with trauma in each of the damaged populations around the epicentre has been estimated and the injuries have been classified by localisation and priority of medical treatment. The results obtained were compared with those estimated for an earthquake of I = IX in the same source area.

The characteristics of each population as well as their geographical location are shown in Table 1 and Figure 1, respectively.

Methods

Studies on seismic danger^{4,5} and the Spanish seismic code (NCSE-02) consider that the most probable case of an earthquake producing serious damage in the metropolitan area of Granada would have an intensity of VIII with an epicentre between Atarfe and Pinos Puente in the Sierra Elvira fault.

To determine the characteristics of this hypothetical scenario, the SES 2002⁶ simulator of seismic scenarios was used. The classification of the victims by types and categories was performed

using the tables of human vulnerability developed by Di Sopra and Schiavi⁷ using data from the Friuli (Italy) earthquake in 1976.

The SES 2002 is a computer application developed by the General Administration of Civil Protection and the National Geographic Institute to estimate the possible effects which hypothetical earthquakes would produce in Spain. It is oriented towards the prevention and the preparation of seismic emergencies. The calculations are made from focal parameters, attenuation laws, construction vulnerability and the population in each town affected. The results are presented for each municipality (minimum territorial unit of calculation) in tables and graphs using the Geographic Information System (GIS). Distribution of seismic intensity, dwelling damage (organised and quantified by different levels of damage) and the number of potential victims (dead, injured and homeless) are obtained for each earthquake.

The earthquake of I = VIII studied has been situated at approximately 37.24 N, 3.73 W, with a depth of 10 Km and an estimated magnitude $M_w \geq 6.8$. The case of an earthquake of I = IX of low probability of occurrence ("rare" earthquake according to Eurocode 8), with a 10% probability in 50 years, has been located at the same foci with an estimated magnitude of $M_w \geq 6.8$. Simulations with the four models available in the SES 2002 were made for each case: maximum SES, minimum SED, Irpinia and ATC. The first and second are specific proposals by the working group for Spain and are based on studies of vulnerability of constructions which consider each as the worst and the best behaviour of the buildings towards

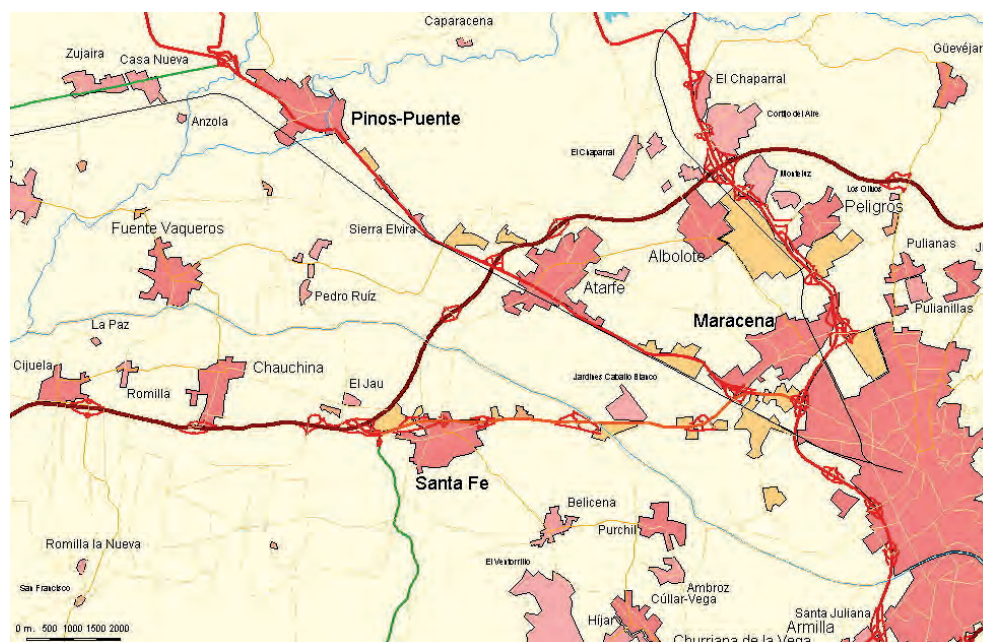


Figure 1. Geographical localization of Granada and the northern metropolitan area of the Sierra Elvira epicentre of the hypothetical earthquake.

seismic shaking, respectively. The Irpinia model uses the matrixes of probability of damage obtained by Chávez⁸ with the Italian earthquake of November 23, 1980 for constructions of vulnerability similar to those in Spain. The ATC model⁹ is that used by the FEMA (Federal Emergency Management Agency) in the simulator programme of HAZUS scenarios¹⁰ with data of vulnerability of American constructions. The maximum SES damage and victim model were what was finally used in this study.

The vulnerability of the human body against different critical situations provoked by earthquakes (collapse of buildings, falling of objects and materials, etc.) can also be measured with studies carried out with the data collected from patients admitted to hospitals after a seismic catastrophe. After analysing the studies available for the classification of victims (among which those performed in 1983⁷, 1985^{9,11}, 1994¹²⁻¹⁴, 1996¹⁵, 1997¹⁶, 1999^{17,18} are of note), the methodology used by Di Sopra and Schiavi⁷ for the two earthquake types considered in this study were used. This methodology was used because of the recommendations of other authors¹⁹ and, in addition, because the construction typology of the buildings and the magnitude of the earthquake were similar to those studied herein. These authors described the localisation and the percentage of casualties produced by the earthquake in Friuli on May 5, 1976 with a magnitude (M) 0

6.4 (Table 2) in 1,000 patients admitted to the Hospital Civil in Udine. Of all the victims, 27% were deaths and 73% casualties. Among the latter, 80% had traumatismos and 20% different medical problems.

Likewise, a study was undertaken in 1990 for Granada²⁰ in which the damage and number of victims produced by an earthquake with an epicentre near the city of Granada were taken into account (Table 3). This study also included a classification of the casualties by categories (corresponding to the classical triage categories) based on the severity of the victims and aimed at predicting which patients most required assistance and the resources necessary for their evacuation. The mean radii of seismic attenuation for the zones of intensity IX, VIII and VII (MSK) were 15, 26 and 40 Km, respectively.

The cases of medical problems studied in the present report corresponded to trauma lesions directly produced by the earthquake since the estimations of the number of victims made by the SES 2002 take into account the injuries provoked by construction damage. This means that, according to the study of the Friuli earthquake, which has been confirmed by other studies of victims of other relevant earthquakes^{11,15,16,18}, the number of victims may be 20% higher if non traumatological medical problems (cardio-circulatory, obstetric, anxiety, stress, etc.) are taken into account.

Table 2. Localisation and type of trauma lesions found in 1,000 patients injured in the Friuli earthquake

Localization	Type of trauma									Total % injured	% trauma- tised
	Contusion		Injury		Dislocation	Fracture		Open	Amputation		
	Total % injured	% contusions	Total % injured	% injured		Closed % fractures	% fractures				
Cranio-facial	18	–	86	40.5	4	14	–	8	–	130	19
Spinal	–	–	–	–	–	20	10	2	–	24	3.5
UE	2	–	14	–	6	56	22.9	4	6	88	12.9
Thorax	6	–	–	–	–	64	–	2	–	72	10.6
Pelvis	2	–	20	–	16	–	–	–	–	38	5.6
ML	12	–	40	18.8	6	106	37.8	8	6	178	26.1
Polycontusion	54	70	52	24.5	–	4	–	2	–	152	22.3
Total	34	100	212	100	16	280	100	22	12	682	100

UE: upper extremities; LE: lower extremities.

Table 3. Quantification of victims by triage categories according to the localisation of the traumatism

Localisation	Total n°	1 st category	2 nd category	3 rd category
CET	1,859	125	257	1,457
Spinal injury	342	28	14	300
UE trauma	1,285	85	80	1,120
Thoracic trauma	1,028	30	85	913
Pelvic injury	542	6	71	465
LE trauma	2,570	114	570	1,886
Polycontusion	2,376	–	311	2,065
Total	9,982	388	1,388	8,206

CET: cranioencephalic trauma, UE: upper extremity; LE: lower extremity.

The following results were obtained on applying the percentages of the injuries and the categories established to the estimation of the victims obtained with the seismic scenario simulator SES 2002.

Results

It was estimated that for the case of an earthquake with $I = VIII$ (EMS) there would be 313 mortal victims and 1,865 casualties of different consideration. The classification of the casualties by categories based on the severity of the injuries was of around 4% of very severe injuries (1st cate-

gory), approximately 14% of moderate casualties and 82% with slight injury. The most frequent localisation of the lesions was the lower extremities (26%), followed by polycontusions (23%), head trauma (19%), the upper extremities (13%), thorax (10%), pelvis (6%) and lastly, spinal injury (3%).

Table 1 shows the estimation of the victims and construction damage for each municipality. In addition to the previously mentioned victims, it is of note that 35,113 would become homeless, with a total of 165,362 homes being damaged, 436 homes would collapse and another 4,787 would be very seriously damaged.

Table 4 shows the results of the estimation of the victims, classified according to the localisation of the injuries for the cases of earthquakes with intensities VIII and IX and an epicentre in Sierra Elevada (Granada). In the first case, the 1,865 estimated victims were classified as (Figure 2) 73 casualties of the 1st category (red), 258 in the 2nd category (yellow) and 1,534 casualties in the 3rd category (green). These values are 11-fold greater in the second case (earthquake with $I = IX$) increasing from 1,865 casualties in the first case to 21,289 in the second. Similarly, the number of victims in each category was also multiplied by 11 (Figure 3).

Table 4. Victims by categories according to the localisation of the injuries, in an earthquake of intensity (I) VIII and IX and an epicentre in Sierra Elevada (Granada)

Localisation	Total n°		1 st category		2 nd category		3 rd category	
	I = VIII	I = IX	I = VIII	I = IX	I = VIII	I = IX	I = VIII	I = IX
Head	352	4.024	13	156	49	559	290	3.309
Spinal injury	65	745	3	29	9	103	53	613
UE	237	2.704	9	105	33	375	195	2.224
Thorax	196	2.235	8	87	27	310	161	1.838
Pelvis	103	1.171	4	45	14	163	85	963
LE	483	5.514	19	214	67	765	397	4.535
Polycontusions	429	4.896	17	190	59	680	353	4.026
Total	1.865	21.289	73	826	258	2.955	1.534	17.508

UE: Upper extremities. LE: Lower extremities.

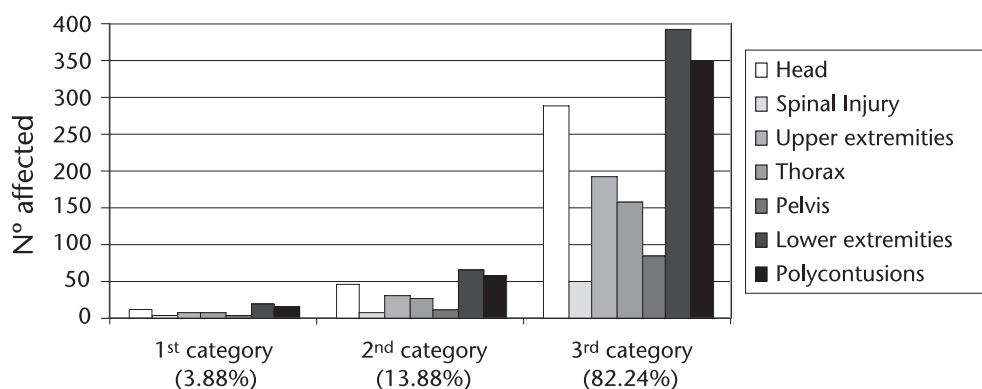


Figure 2. Graphic representation of the most frequent localisations of injuries and their severity (category) for the case of an earthquake with an intensity VIII and an epicentre in Sierra Elevada (Granada).

In seismic disasters the survival of the victims depends on the time until rescue, triage and emergency treatment, with the first 24 hours being critical. Following the initial triage of the victims, the first treatment and stabilisation of the critical patients is urgent as is the transfer of the casualties (according to the classification) by the evacuation chain.

Taking into account the estimation of the probable victims in earthquakes with an epicentre in Sierra Elevada, it was proposed that the Advanced Care Posts (ACP) and the healthcare centres send the “red” patients to the hospitals of Granada within the first 8 hours of the crisis. This area has two third level hospitals, the Complejo Hospitalario Universitario Virgen de la Nieves and the Hospital Clínico San Cecilio, each with 1,062 and 699 beds, respectively. In addition, the Hospital San Juan de Dios, which belongs to the Healthcare Council and the Hospital San Rafael of the Hermanos de San Juan de Dios under the Andalus Ministry of Health, as well as the private

clinics La Inmaculada and Nuestra Señora de la Salud would provide support after having previously performed rapid inspection of their operability. The Units of Prehospital Stabilisation (UPS) and the Units of Surgical Rescue (USR) would also be located at the airport of the capital for the Military Healthcare team where a field hospital would also be set up if required. The “yellow” patients would go to hospital outside the city of Granada according to their disease, hospital proximity and availability. The “green” patients would be derived to nearer healthcare centres. The hospitals would accept all the red patients and only direct yellow according to the hospital availability.

The seismic vulnerability study of some hospital installations of Granada has shown that rapid post-earthquake inspection of the safety and operability of the hospitals is essential, particularly in the case of an I = IX. The support hospitals and especially the county hospitals of Baza and Motril, as well as the Andalusian reference hospitals must

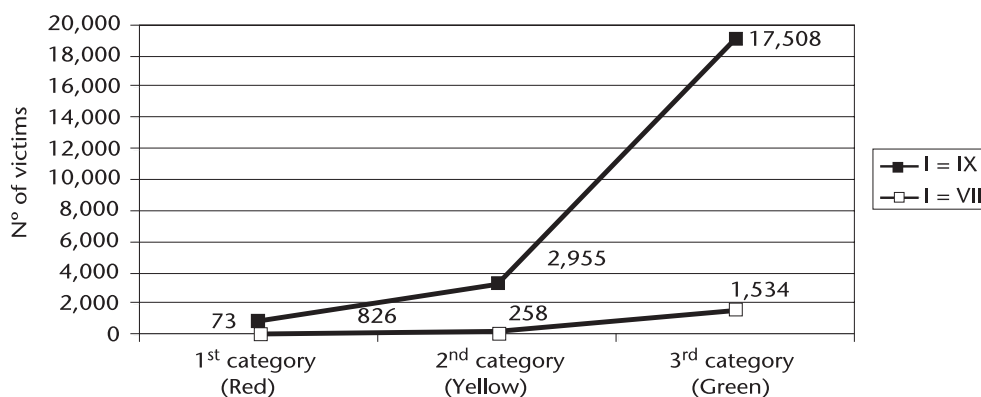


Figure 3. Graph comparing the number of victims classified by categories for the cases of Intensity (I) = VIII and I = IX in Sierra Elevada (Granada).

be prepared to receive and provide assistance to the victims referred thereto from the ACP and the hospitals and private clinics of Granada when their operating limit has been reached.

Discussion

The results of the application of the SES 2002 using the maximum SES model for the earthquakes studied have provided figures for victims based on the different levels of damage (structural and non structural) to the buildings. The maximum SES model of damage and victims was chosen because the matrixes of vulnerability most closely match those of the constructions in the study area, while the minimum SES considers less than real vulnerability. The Iripina model provides greater damage and, consequently, victims than the first but may be a reference for constructions to areas prior to 1980. The ATC model is similar to the maximum SES model but reports a greater number of casualties, probably for considering higher central values of magnitude for each intensity than those estimated herein. This approach to damage and victims is realistic since it is supported by the Iripinia and ATC data corresponding to areas of greater and lesser construction vulnerability, respectively. Nonetheless, it should be taken into account that the results are general and should be considered as mean indicators very close to a hypothetical reality, since, despite having updated the databases to reduce the margin or error of the results obtained, some factors may modify these values.

The limitations are due to:

- The distribution of the intensity largely depends on local conditions or ground effects (topography, lithology, water content) which were not taken into account for lack of inclusion in the SES 2002.

- From a statistical point of view, data on Spanish earthquakes are not sufficiently significant to determine the functions of vulnerability (damage.). Thus, data of earthquakes and constructions of similar characteristics (damage in the earthquake in Iripinia, Italy in 1980) were used.

- To estimate the real vulnerability of the constructions, in depth studies must be carried out in the populations in question, since a priori, small construction faults may represent a large increase in vulnerability and, consequently, an increase in the estimation of damage and the number of victims. In this study the mean vulnerability was estimated based on the typology and the state of the constructions.

- The SES does not consider the temporal distribution of the population, and thus, does not evaluate the differences in the damage caused by the same earthquake at different times of the year or at different times of the day. Nonetheless, variations with respect to the mean have been estimated and hourly intervals have been taken into account with approximately 20% more victims in the case of an earthquake during the night.

- The SES only calculates the damage provoked in housing buildings. However, there are also other numerous types of damage caused in other constructions or triggered by secondary dangers (fires, tsunamis, liquefaction, land slides, etc.) and important indirect damage not quantified, although an approximate estimate may be made with an in depth study of the placement of the constructions and installations.

In general, almost all the analyses on seismic risk in some zone of Spain have been carried out in depth. These include those made in Alcoy²¹, Lorca²², Alicante²³ and Barcelona²⁴, among others. This carries a certain economic cost which is in contrast to the social relaxation with respect to earthquakes which may be explained by the fact that the last catastrophic earthquake in Spain took place in 1884, more than 120 years ago. Moreover, the studies performed have been focused on analysing seismic danger and the methodology used considerably varies. Few cases²⁵⁻²⁸ have studied vulnerability and damage calculation in depth such as in the cases of Adra^{29,30}, Granada^{28,31}, Catalonia and Barcelona³². This is similar in other countries including the United States¹⁹, Portugal, Italy, Turkey, Colombia, etc. To make these assessments Geographical Information Systems (GIS) with commercial applications are required: Arc-ViewTM, Map InfoTM, Arc-GisTM, etc.

The estimation of human victims due to an earthquake is a complex problem¹¹. Definition of the number of casualties determines the initial demand of the healthcare system. Different models have been proposed for the estimation of human victims produced by an earthquake³⁴, with those of Coburn and Spence^{35,36} and the ATC-13 (1985)⁹ being of note. The first established the use of an analytical expression adjusted from the analysis of more than 1,000 important earthquakes. This relation is specific for collapsed buildings and, among other parameters, considers the population per building and occupation according to the time of the day.

The methodology proposed by the ATC establishes percentages of people affected (slight injuries, severe injuries and deaths) based on the

different levels of damage (structural and non structural) to the buildings, deduced by a group of experts according to earthquakes which have occurred in the USA, and those with grade 3, 4, and 5 damage are the most decisive.

Other alternatives³⁷ contemplate the possibility of directly adjusting a correlation or law of intensity-casualties for each seismic scenario which will allow determination of the percentage of casualties of each population affected and the response of a regional hospital network for each value of macroseismic intensity.

Conclusions

The most probable destructor earthquake which may be expected in the city of Granada (located within the area of greatest seismic danger in Spain) is that with an epicentre in Sierra Elvira with a maximum intensity of grade VIII. The most destructive which could occur in this zone would be I = IX which would produce a very high number of deaths (3,548) and casualties (21,289) multiplying the number of victims with respect to I = VIII by 11. The quantity of populations with damage, and the very high number of casualties of different categories in the case of I = IX would make this earthquake of national interest, thereby requiring the participation of many organisms and implying a different and specific study of this grade of intensity. For the case of intensity VIII, a total of 313 deaths and 1,865 casualties of different severity requiring healthcare assistance was estimated, with around 4% of very severe injuries (1st category), approximately 14% of moderate severity (2nd category) and 82% of slight injuries (3rd category).

The most frequent localisation of lesions estimated was in the lower extremities (26%) followed by polycontusions (23%), head injuries (19%), upper extremities (13%), thorax (10%), pelvis (6%) and lastly, spinal injury (3%).

The municipalities which would receive the most damage by this seismic movement would be Pinos Puente, Atarfe, Santa Fé, Albolote and Maracena. The number of victims would subsequently be higher in these towns and healthcare efforts would initially be concentrated in these towns with ACPs at each site.

These estimations are fundamental for adjusting the healthcare action plan. They indicate that healthcare assistance must be staggered. A minimum of 6 ACP must be established in less than 2 hours for immediate medial intervention and the

unit of prehospital stay (UPS) and the unit of surgical rescue (USR) must be set up in less than 8 hours to stabilise critical patients. In an I = IX earthquake or in the case of reduction of operability of Granada hospitals, a field hospital would also be necessary.

Taking the results obtained into account a healthcare action plan against a destructive earthquake in the province of Granada must be developed. This plan must provide approaches to attend the victims from a structured, organised base leaving improvisation aside as far as possible with the aim of increasing the survival of the victims, activating an emergency medical assistance team with the necessary logistic support and infrastructure.

References

- 1 Sanz de Galdeano C, Peláez Montilla JA, López Garrido AC. La Cuenca de Granada (Estructura, tectónica activa, sismicidad, geomorfología y dotaciones existentes). 2002. Proyecto PB97-1267-C03 (DGESIC) Grupo RMN 217 (Junta de Andalucía).
- 2 Vidal F. Análisis de la Sismicidad histórica de Andalucía. (Revisión de los principales terremotos históricos ocurridos en los 10 últimos siglos). Observatorio Universitario de Car-tuja. Universidad de Granada. 1988.
- 3 Vidal F. Peligrosidad, Vulnerabilidad y Daños Sísmicos. Conferencia de la Norma de Construcción Sismorresistente Española 2002. Colegio de Arquitectos. Granada 2005.
- 4 Sanz de Galdeano C. Localización geográfica y geológica de la cuenca de Granada. Principales rasgos estratigráficos en la cuenca de Granada. Estructura, tectónica activa, sismicidad, geomorfología y dataciones existentes (Sanz de Galdeano C, Peláez JA y López Garrido AC, Eds). Univ. De Granada. 2001. p. 3-9.
- 5 López Casado C, Sanz de Galdeano C, Molina S, Henares J. The structure of the Alboran Sea: an interpretation from seismological and geological data. *Tectonophysics* 2001;338:79-95.
- 6 SES 2002. Simulador de Escenarios Sísmicos (SES 2002). Estimación rápida preliminar de daños potenciales en España por terremotos. Manual de usuario. Dción. Gral. de Prot. Civil. Disponible en: www.proteccioncivil.org/pefn/gt/manuales/m_usuario.pdf SES 2002. Simulador de Escenarios Sísmicos 2002. Dirección General de Protección Civil. CD Rom. DGPC (ed). 2002.
- 7 Di Sopra L, Schiavi F. First hypotheses for the construction of vulnerability tables for persons involved in earthquake in Italy. Medical aspects. Institute of International Sociology, Gorizia. Italy. 1983.
- 8 Chávez J. Evaluación de la vulnerabilidad y el riesgo sísmico a escala regional: Aplicación a Cataluña. [Tesis Doctoral]. Universidad Politécnica de Cataluña. Barcelona. 1998.
- 9 ATC-13. Earthquake damage evaluation data for California. Applied Technology Council, Redwood City, California. USA. 1985.
- 10 HAZUS-99-SR2. Hazus Technical Manual, Federal Emergency Management Agency, FEMA and National Institute of Building Sciences, NIBS, Washington D.C. 2002. Vol. 1,2,3.

- 11 De Bruycker M, Greco D Lechat MF. The 1980 earthquake in Southern Italy-morbidity and mortality. *Int J Epidemiol* 1985; 197:638-43.
- 12 Erdik M. Developing a comprehensive earthquake disaster master plan for Istanbul. *Issues in Urban Earthquake Risk, NATO ASI Series*. 1994;271:251-265
- 13 Mendes-Vector L, Oliveira C, Pais I, Teves-Costa P. Earthquake Damage Scenarios in Lisbon for Disaster Preparedness. *Issues in Urban Earthquake Risk, NATO ASI Series*. 1994;271:265-291.
- 14 Rojahn Ch. Estimation of earthquake damage to buildings and other structures in large urban areas. *Issues in Urban Earthquake Risk NATO ASI Series*. 1994;271:79-103.
- 15 Durkin M. Fatalities, nonfatal injuries, and medical aspects of the Northridge earthquake. In: Woods MC, Seiple WR, eds. *The Northridge, California, earthquake of 17 January 1994*. Sacramento, CA: California department of Conservation, Division of Mines and Geology Special Publication 116. 1996:247-54.
- 16 Armenian HK, Melkonian A, Noji EK. Deaths and injuries due to the earthquake in Armenia: a cohort approach. *Int J Epidemiol* 2001;26:806-13.
- 17 Balassanian S, Melkounian MG, Manoukian AV, Azarian AR. Seismic risk assessment for the territory of Armenia and atrategy of its mitigation. *Natural Hazards, Kluwer Academic Publishers*. 1999:45-55.
- 18 Tanaka H, Oda J, Iwai A. Morbidity and mortality of hospitalized patients after the 1995 Hanshin-Awaji earthquake. *Am J Emerg Med* 1999;17:186-91.
- 19 Granot H. Proposed scaling of the comunal consequences of disaster. *Disaster Prevention and Management* 1995;4:5-13.
- 20 Álvarez Leiva C, Martínez-Zaldívar Rodríguez T. *Apuntes para: Plan Nacional de Emergencia Sísmica*. Dirección General de Protección Civil. 1990.
- 21 ITGE: Estudio de riesgos naturales en la ciudad de Alcoy. 1990. Pp 214.
- 22 ITGE: Estudio de peligrosidad y vulnerabilidad sísmica en Lorca y su término municipal. 1992. Pp 143.
- 23 Delgado J, López Casado C, Jáuregui P. Uncertainties in the evaluation of soil liquefaction. En: *Seismology in Europe*. Esc ed. Reykiavik (Islandia). 1996. p. 423-428.
- 24 Barbat AH. *El riesgo sísmico en el diseño de edificios*. Cuadernos Técnicos 3. Calidad Siderúrgica S.R.L. 1998.
- 25 Martín AJ. *Riesgo sísmico en la Península Ibérica*. [Tesis Doctoral], Universidad Politécnica de Madrid. 1984. 2 tomos.
- 26 Martín AJ, García Yagüe A. Estimación, para su aplicación a Protección Civil, de los daños que un terremoto catastrófico ocasionaría en Andalucía. *IGN Monografía nº 17*. 1986.
- 27 Martín AJ. Probabilistic seismic hazard analysis and damage assesment in Andalucía (Spain). *Tectonophysics* 1989; 167:235-44.
- 28 Vidal F, del Castillo G. Granada facing an earthquake. NATO Advanced workshop on an evaluation of guidelines for developing earthquake scenarios for urban areas. Istanbul, 8-11 octubre de 1993.
- 29 Vidal F. Sacudidas sísmicas, vulnerabilidad, daños sísmicos y evaluación post-terremoto de la seguridad de edificios. En *Inspección y Clasificación de la Seguridad de las construcciones*. Colegio Oficial de Arquitectos de Andalucía Oriental. 1994. p. 1-42.
- 30 Vidal F. *Medidas Preventivas y de Protección frente a terremotos*. ISBN 84-6049167-6. Imprenta Gráficas del Sur. Granada. 1994. pp 16.
- 31 Vidal F. Terremotos, sacudidas sísmicas y daños sísmicos. En *Curso de Riesgos Naturales*. Universidad Internacional de Andalucía. La Rábida. 1994. p. 1-40.
- 32 Chávez J. *Evaluación de la vulnerabilidad y el riesgo sísmico a escala regional: Aplicación a Cataluña*. [Tesis Doctoral]. Universidad Politécnica de Cataluña. Barcelona. 1998.
- 33 Durkin ME. Casualties, search and rescue, and response of the health care system. *Earthquake Spectra*. California. 1987;3:127-32.
- 34 Safina S. *Vulnerabilidad Sísmica de edificaciones esenciales. Análisis de su contribución al riesgo sísmico*. [Tesis Doctoral]. Univ. Polit. Cataluña. Barcelona. 2002.
- 35 Coburn AW, Spence RJS, Pomonis A. Factors determining human casualty levels in earthquakes: mortality prediction in building collapse. In: *Proceedings of the First International Forum on Earthquake related Casualties*. Madrid, Spain, July 1992. Reston, VA: U.S. Geological Survey.
- 36 Coburn A, Spence R. *Earthquake Protection*. Second Edition, John Wiley and Sons Ltd., Chichester, England. 2002.
- 37 Nuti C, Vanzi I. GHOST: A procedure and a program for the postearthquake scenario and probabilistic analysis of a regional hospital's network performance. *Reporti nº 1/99*. Università degli Studi Gabriele D' Annunzio de Chieti. Chieti. Italia. 1999.

Estimación y clasificación de las víctimas potenciales de un terremoto dañino en el área metropolitana de Granada

Martínez-Zaldívar Moreno M, Vidal Sánchez F, Gómez Jiménez FJ

Objetivos: Estimar el número potencial de víctimas en un hipotético terremoto de intensidad de grado VIII (EMS), con epicentro en Sierra Elvira (cercano a Granada) y clasificar los heridos en función de la localización y gravedad de sus lesiones. Estos datos se comparan con los estimados para otro terremoto de intensidad IX, mucho menos probable, ubicado en la misma zona.

Método: Se ha utilizado el simulador de escenarios sísmicos SES 2002 y las tablas de vulnerabilidad humana propuestas por Di Sopra y Schiavi.

Resultados: Los daños esperados en viviendas son: 436 colapsadas, 4.787 con daños muy graves y 21.251 con daños graves. Las víctimas ocasionadas son: 313 muertos, 1.865 heridos (de distinta consideración) y 35.113 personas sin hogar. La clasificación de los heridos por categorías: 73 de 1ª (muy graves, rojos), 258 de 2ª (moderados, amarillos) y 1.534 de 3ª (leves, verdes). La localización más frecuente de las lesiones es en: miembros inferiores (26%), policontusiones (23%), cabeza (19%), miembros superiores (13%), tórax (10%), pelvis (6%) y en último lugar en médula espinal (3%).

Conclusiones: Estas estimaciones son fundamentales para ajustar el Plan de Actuación Sanitaria. Indican que la asistencia sanitaria ha de ser escalonada, que necesita establecer en menos de 2 horas un mínimo de 6 Puestos Sanitarios Avanzados para la intervención médica inmediata, y desplegar en menos de 8 horas Unidades de Estabilización Pre-hospitalaria y Unidades de Rescate Quirúrgico, para estabilización de pacientes críticos. En un terremoto de intensidad IX o en el caso de disminución de operatividad de los hospitales granadinos es también necesario un Hospital de Campaña. [Emergencias 2008;20:198-206]

Palabras clave: Terremotos. Emergencia. *Triage*. Catástrofes. Desastres. Rescate. Asistencia sanitaria. Víctimas.